


## 40 ft Refrigerated ISO Cargo Container



## **PRODUCT FEATURES**

- > Steel sides and roof
- Double full opening swing doors on one end with padlocks
- > Forklift pockets
- > Aluminium T-grade floors
- > Refrigerated machinery features electrical supply as follows: 208/230, 380/460 Volts AC, 3 phase, 50 or 60 cycle
- > Temperature range from -30 °C to 21 °C (-20 °F to 70 °F)

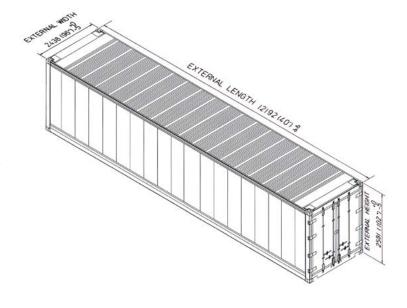

SBI-100449\_v2-0

## **40 FT REEFER SPECIFICATIONS**

	Length		Height		Width		Door Opening	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
mm	12,192	11,602	2591	2226	2438	2276	2299	2276
ft in	40'0"	38′ ³/4″	8' 6"	7' 3 <sup>5</sup> / <sub>8</sub> "	8' 0"	7′ 5 <sup>5</sup> / <sub>8</sub> ″	7' 6 <sup>1</sup> / <sub>2</sub> "	7' 5 <sup>5</sup> / <sub>8</sub> "

	Tare Weight	Maximum Payload	Maximum Gross Weight	Cubic Capacity	
kg	4350	26,130	30,480	58.8 m³	
lb	9590	57,610	67,200	2076 cu ft	

www.intlcert.com

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD
ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS